

Overview

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special oneway valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.



Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid


General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.
- Case and cover available in both standard and flame retardant ABS.

Dimensions and Weight

Length(mm / inch)	173/6.81
Width(mm / inch)	111/4.37
Height(mm / inch)	329/12.96
Total Height(mm / inch)	364/14.3
Approx. Weight(Kg / lbs)	14.2/31.3

* Weight deviation: $\pm 3\%$

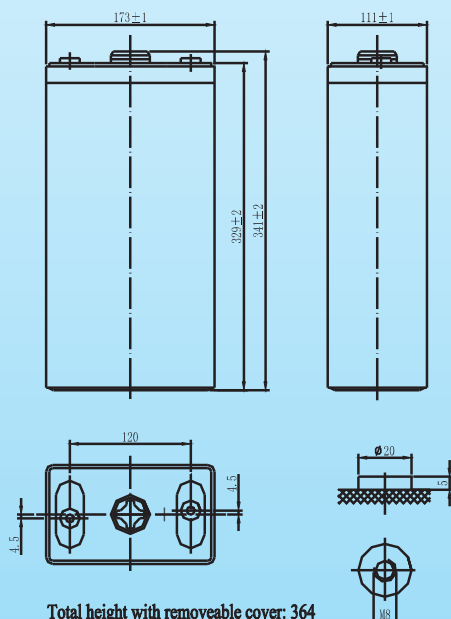

Battery Specification

Performance Characteristics	
Nominal Voltage	2V
Number of cell	1
Design Life	20 years
Nominal Capacity 77°F(25°C)	
10 hour rate (20.0A, 1.8V)	200Ah
5 hour rate (36.3A, 1.75V)	181.5Ah
1 hour rate (124A, 1.6V)	124Ah
Internal Resistance	
Fully Charged battery 77°F(25°C)	$\leq 0.80\text{mOhms}$
Self-Discharge	
3% of capacity declined per month at 20°C(average)	
Operating Temperature Range	
Discharge	-20~60°C
Charge	-10~60°C
Storage	-20~60°C
Max. Discharge Current 77°F(25°C)	
1000A(5s)	
Charge Methods: Constant Voltage Charge 77°F(25°C)	
Cycle use	2.40-2.45VPC
Maximum charging current	40A
Temperature compensation	-5.0mV/°C
Standby use	
2.20-2.30VPC	
Temperature compensation	-3.3mV/°C

Discharge Constant Current (Amperes at 77°F25°C)

End Point Volts/Cell	Time						
	15min	30min	45min	1h	3h	5h	10h
1.60V	294	196	162	124	56.6	39.3	21.4
1.65V	280	187	155	120	54.8	38.4	21.2
1.70V	265	178	148	115	52.9	37.4	20.9
1.75V	250	169	141	110	50.8	36.3	20.5
1.80V	235	160	134	104	48.6	35.0	20.0

Discharge Constant Power (Watts at 77°F25°C)

End Point Volts/Cell	Time						
	15min	30min	45min	1h	2h	3h	5h
1.60V	524	380	308	245	146	106	78.0
1.65V	499	364	299	235	142	104	76.6
1.70V	473	348	289	224	137	101	75.1
1.75V	446	331	280	213	132	98.0	73.5
1.80V	420	315	272	201	126	94.7	71.7

(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.All data shall be changed without notice, Vision reserves the right to explain and update the information contained hereinto.

