

Overview

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special oneway valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.



Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid


General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.
- Case and cover available in both standard and flame retardant ABS.

Dimensions and Weight

Length(mm / inch)	395 / 15.6
Width(mm / inch)	110 / 4.33
Height(mm / inch)	286 / 11.3
Total Height(mm / inch)	293 / 11.5
Approx. Weight(Kg / lbs)	31.5 / 69.4

* Weight deviation: ± 3%

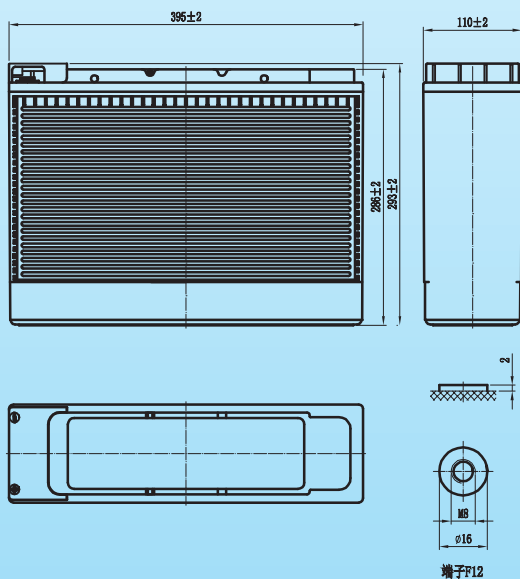

Battery Specification

Performance Characteristics	
Nominal Voltage	12V
Number of cell	6
Design Life	10years
Nominal Capacity 77°F(25°C)	
10 hour rate (10.5A, 10.8V)	105Ah
5 hour rate (19.0A, 10.5V)	95Ah
1 hour rate (73.2A, 9.6V)	73.2Ah
Internal Resistance	
Fully Charged battery 77°F (25°C)	≤6.5mOhms
Self-Discharge	
3% of capacity declined per month at 20°C(average)	
Operating Temperature Range	
Discharge	-20~60°C
Charge	-10~60°C
Storage	-20~60°C
Max. Discharge Current 77°F(25°C)	900A(5s)
Short Circuit Current	2100A
Charge Methods: Constant Voltage Charge77°F(25°C)	
Cycle use	2.40-2.45VPC
Maximum charging current	31.5A
Temperature compensation	-30mV/°C
Standby use	2.20-2.28VPC
Temperature compensation	-20mV/°C

Discharge Constant Current (Amperes at 77°F25°C)

End Point								
Volts/Cell	10min	15min	30min	45min	1h	3h	5h	10h
1.60V	--	--	121	92.4	73.2	30.3	19.3	10.6
1.65V	--	--	117	89.7	72.0	30.0	19.2	10.6
1.70V	--	--	112	87.0	70.1	29.4	19.1	10.5
1.75V	--	--	108	84.2	69.0	29.0	19.0	10.5
1.80V	--	--	104	81.5	67.0	28.5	18.9	10.5

Discharge Constant Power (Watts at 77°F25°C)

End Point								
Volts/Cell	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	--	--	234	180	145	81.6	59.8	38.9
1.65V	--	--	224	174	141	80.7	59.3	38.6
1.70V	--	--	215	168	137	79.7	58.7	38.3
1.75V	--	--	206	162	133	78.7	58.2	38.0
1.80V	--	--	196	156	130	77.8	57.7	37.7

(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.All data shall be changed without notice,Vision reserves the right to explain and update the information contained hereinto.



VISION GROUP
Shenzhen Center Power
Tech.Co.Ltd.,

CT12-105EX

12V105Ah(10hr)

