


Overview

Vision V-LFP48V50Ah lithium iron phosphate battery system serves for telecom and energy storage system with perfect compatibility and long cycle life

Features

- Built-in BMS with over-charge, over-discharge, over-temperature, over-current protection etc, compatible with standard telecom and energy storage system
- SOC and SOH indication
- RS485 communication port
- Fast charging, charging rate available
- Good high temperature performance

Battery Panel


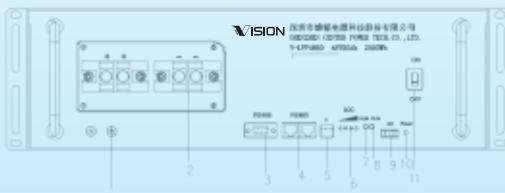


- Earthing terminal
- Positive and negative
- communication interface(DB9-RS485)
- communication interface(RJ45-RS485)
- address number(ID)
- capacity (SOC)
- alarm light(ALM)
- run ling(RUN)
- DO port
- Reset system(Reset)
- switch(ON/OFF)



Battery Specification

Nominal Characteristics	
Nominal Voltage /V	48
Nominal Capacity /Ah (35° C , 0.2C)	≥50
Mechanical characteristics	
Weight (approximate)/Kg	31±0.3
Dimension L*W*H /mm	442*440*135mm
Terminal	M6
Electrical characteristics	
Voltage window/V	42 to 54
Float charge voltage/V	51.8
Max. continue charge current/A	50
Max. continue discharge current/A	50
Max. Pulse discharge current/A	55A for 30S
Discharging Cut-off Voltage/V	42
Operating conditions	
Cycle life(+35°C 0.2C 80%DOD)	>4500 Cycles
Operating temperature	Discharge -20°C to 60°C, Charge 0°C to 60°C
Storage temperature	0 to 30°C
Storage duration	12 months at 25°C
Safety standard	UN38.3, GB-EMC

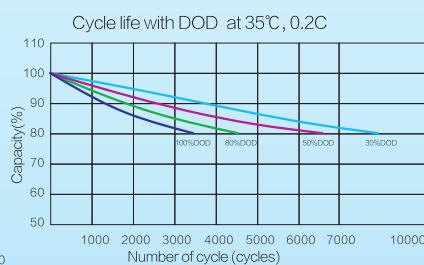

V-LFP48V50AH				
Discharge constant current(Amperes at 77° F,35°C)				
Eon Point Volts/Cell	0.1C	0.2C	0.5C	1C
Time		Hours		
46.5	10.50	5.21	2.03	0.91
45.0	10.73	5.33	2.08	1.03
43.5	10.88	5.41	2.15	1.06
42.0	10.96	5.46	2.17	1.08